
# **DRIVING VIDEO** RECORDER DR 530 Quick Guide





Dashcam x 1


Vehicle Battery Protection Module Cable x 1

(Optional)

# Induction Area Micro USB Power Socket Card Slot LED Definitions:

# PACKAGE OVERVIEW



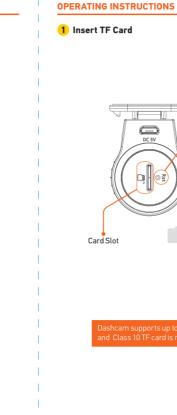







the windshield and near the rear-view mirror without obstruction.

2.2 Connect the USB power cable with Dashcam and car charger, concealing the cable as per sketch map above.

2.3 When the vehicle is started, the Dashcam will boot up automatically with an audio greeting "Hello".

3 Connect The Dashcam to Mobile Phone

Settings --- WI AN --- Select "M-XXXXX" --- Enter password "12345678" --- Inin --- HELLA DVR - DR 530

## 4 Smart Gesture Sensing

Activate Smart Gesture Sensing by waving your hand under the Dashcam to take a photo while driving.

Change setting in the "Capturing photo and video" APP option to also record a 25 seconds short video (first 5 seconds and last 20 seconds) with Smart Gesture Sensing.

"Gallery Photos" section of the APP. As for the videos, you can download them to your mobile phone from the Dashcam Videos "Clins" section of the APP

You can download the photos to your mobile phone from the

## 5 GPS Module (Ontional) The GPS Module is embedded in the power cable, which tracks

the location and speed of vehicles and records your trip.

NOTE: For faster location detection, the GPS must be

## 6 Vehicle Battery Protection Module

In order to prevent the car battery from unnecessary discharge during parking mode, the Vehicle Battery Protection Module will monitor and cut off power supply to the Dashcam when the battery voltage falls below 11.5 V.

## 7 Fatique Alert

Voice reminder alert will be activated every 2 hours for long haul driving. This feature can be activated through the APP.

## 8 Remote Access (Always Connected)

Real-time video can be viewed through the APP when connected.

Play video stored in your Dashcam anytime on your smartphone or tablet.

## 9 Update

The Dashcam has an OTA updating system, you will receive the latest firmware by the Dashcam APP, Click the "Send Firmware and Upgrade" in the Dashcam settings to complete the updating. 10 Other Settings Enter the settings page to modify the general settings. You can change the G-sensor sensitivity mic switch volume etc

11 Reset

Proce the recet hutton for a few seconds to recet Dashcam, the default Wi-Fi password is 12345678.

12 Disclaimer

- This device is NOT intended to be used for illegal purposes: surveillance and shall not be used in any form as evidence for claim nurnoses
- Some countries prohibit drivers from mounting anything on the windshield, or restrict mounting to specific areas of the windshield. It is the owner's responsibility to mount the device in compliance with local laws
- Errors may occur depending on the surrounding environment and the voltage of the car.
- The Company is not liable/responsible for non-recorded event. missing files, etc.

HELLA KGaA Hueck & Co.

Rixbecker Straße 75 59552 Lippstadt / Germany www.hella.com

Distributed by:

HELLA Asia Singapore Pte Ltd 2 International Business Park #02-12 The Strategy

Singapore 609930 www.hellaasia.com

DR 530

PACKAGE CONTENTS









DR 530

DR 530